





# Accessibility in an E-Bike City

## Conference Paper

### Author(s):

[Ballo, Lukas](#) ; [Sallard, Aurore](#) ; [Meyer de Freitas, Lucas](#) ; [Axhausen, Kay W.](#) 

### Publication date:

2024-05

### Permanent link:

<https://doi.org/10.3929/ethz-b-000681403>

### Rights / license:

[In Copyright - Non-Commercial Use Permitted](#)

# Accessibility in an E-Bike City

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31

Working Paper

Submitted on 30.04.2024

Swiss Transport Research Conference, 15.-17.05.2024, Ascona

**Lukas Ballo** (corresponding author)

Institute for Transport Planning and Systems, ETH Zurich

CH-8093 Zurich

ORCID: 0000-0002-0843-0553

Email: lballo@ethz.ch

**Aurore Sallard**

Institute for Transport Planning and Systems, ETH Zurich

CH-8093 Zurich

ORCID: 0000-0001-6465-858X

Email: asallard@ethz.ch

**Lucas Meyer de Freitas**

Institute for Transport Planning and Systems, ETH Zurich

CH-8093 Zurich

ORCID: 0000-0002-0280-8914

Email: mlucas@ethz.ch

**Kay W. Axhausen**

Institute for Transport Planning and Systems, ETH Zurich

CH-8093 Zurich

ORCID: 0000-0003-3331-1318

Email: axhausen@ethz.ch

## 1 **ABSTRACT**

2 Decades of investments in transport infrastructure have created large welfare gains through increased  
3 accessibility. However, the current traffic patterns necessary for maintaining these accessibility levels  
4 are in conflict with the need for a rapid decarbonization of the transport system. In this paper, we  
5 evaluate the accessibility effects of an E-Bike City in Zurich, Switzerland and test whether an urban  
6 transportation system based heavily on sustainable modes modes like bicycles and public transit could  
7 still deliver the current accessibility levels. We generate an alternative transportation network within the  
8 existing road space using SNMan, a network design tool developed as part of the E-Bike City Project.  
9 Second, we use MATSim to simulate the traffic loads of the modified network and finally, calculate a  
10 gravity-based accessibility measure for every resident in the city. This paper reports on the current state  
11 of work, especially the literature, methodology and the data used, while the results are planned in a later  
12 version.

13

## 14 **KEYWORDS**

15 E-Bike City; Micromobility; Road Space Allocation; Cycling Network; MATSim

16

## 1 INTRODUCTION

Decades of transport infrastructure investments have delivered massive improvements in accessibility (Axhausen et al., 2011). Increasing speeds and decreasing real travel cost have created economic benefits in consumer choice, specialization, and residential options. More travel has allowed reaching more destinations or developing settlements with lower density. However, it remains unclear how it can be reconciled with the need to decarbonize (IPCC, 2022) the transport sector within the next decades (Axhausen, 2022). Commonly discussed technical developments such as battery-electric vehicles (BEV) will not be sufficient and fast enough (de Blas et al., 2020; Gebler et al., 2020; Cox et al., 2018) to reach this goal. Other approaches like mobility pricing, or massive transit investments are either politically infeasible (Lichtin et al., 2024), or will take a very long time, with uncertain effects. As an example, in Switzerland, despite exceptionally high transit and rail investments, the mode share of transit is stagnating around only 20% (BFS and ARE, 2023).

E-Bike City (Ballo et al., 2023) is an alternative approach to reducing transport emissions within the next two to three decades. Building on top of similar visions like 15-minute cities (Moreno et al., 2021) or Superblocks (Rueda, 2019; Eggimann, 2022), it presents a possible model for changing urban transport systems in favor of sustainable and equitable modes. Its core hypothesis is that current levels of accessibility can be produced sustainably if future transport systems in cities will be centered on public transit and bicycles. This should be achieved by allocating approximately 50% of road space to dedicated cycling infrastructure and prioritizing public transit, while still providing basic access for regular motorized traffic.

In past work, we have presented the overall concept of an E-Bike City (Ballo et al., 2023), as well as an algorithm for allocating the road space (Ballo and Axhausen, 2024) but so far, little is known about the effects of such transformation on performance of the transport system. In this paper, we test the core hypothesis of maintaining today's accessibility levels in Zurich, Switzerland. We use potential-based accessibility (Hansen, 1959), extended with mode choice probabilities (Ben-Akiva and Lerman, 1979) to represent the changes experienced by people with different residential locations and demographic attributes. Further, we elaborate on the expected equity implications based on how these changes affect exemplary groups in the population.

Chapter 2 reports the current mobility choices in Zurich. Chapter 3 shows an overview of previous work. Chapter 4 explains the methods used and chapter 5 shows the results. Chapters 6 and 7 close the paper with a discussion and conclusions.

## 2 MOBILITY IN ZURICH

As of 2024, the municipality of Zurich has a population of 443'037 inhabitants, an area of 91.9 km<sup>2</sup>, and roughly 1.9 Million inhabitants living within its entire metropolitan region (City of Zurich, 2024). Based on data from the Swiss travel survey (BFS and ARE, 2023), the mode share of private cars is 28.4% for trips within the city and 44.4% for cross-border trips. However, private cars dominate the streets by accounting for 84.4% of the total vehicle kilometers. Table 1 gives an overview.

**Table 1: Mobility in Zurich in 2024**

		Other	E-bike	Private Cars	Public Transit	Bicycle	Walking	All	All excl. walking
	avg. occupancy	1	1	1.2	20	1			
Within the City of Zurich	pkm	202	793	13030	14360	6886	10549	45820	35271
	vkm	202	793	10858	718	6886			19457
	% pkm	0.4%	1.7%	28.4%	31.3%	15.0%	23.0%	100.0%	77.0%
Cross-Border trips	pkm	1189	416	113723	137841	2488	631	256288	255657
	vkm	1189	416	94769	6892	2488			105754
	% pkm	0.5%	0.2%	44.4%	53.8%	1.0%	0.2%	100.0%	99.8%
Total	pkm	1391	1209	126753	152201	9374	11180	302108	290928
	% pkm	0.5%	0.4%	42.0%	50.4%	3.1%	3.7%	100.0%	96.3%
	vkm	1391	1209	105628	7610	9374			125211
	% vkm	1.1%	1.0%	84.4%	6.1%	7.5%			100.0%

1

## 2 3 PREVIOUS WORK

### 3 3.1 Accessibility

4 Many different definitions of accessibility exist to represent the performance of transport systems. Geurs  
5 and van Wee (2004) criticize that the measures often used are insufficient and propose a systematic  
6 framework of different accessibility types. The possibilities of different people to interact with others is  
7 commonly expressed using place-based LogSum of potentials, weighted by a function of generalized  
8 cost to reach them, originally defined by Hansen (1959). Ben-Akiva and Lerman (1979) extend this  
9 definition by adding behavioral components such as mode choice, consistent with the random-utility  
10 theory. A combination of these two allows the expression of place-based accessibility based on all  
11 available destinations and modes to reach them.

### 12 3.2 Street network redesign

13 Multiple pieces of work have proposed algorithms for automatically generating optimal cycling  
14 networks, e.g., Szell et al. (2022), Steinacker et al. (2022), Paulsen and Rich (2023). However, they  
15 ignore the tradeoffs where adding cycling infrastructure is only possible by removing lanes originally  
16 assigned to other modes. In our previous work, we have introduced a process for network-wide  
17 reallocation of road space while maintaining a set of connectivity and accessibility criteria for all modes,  
18 implemented in Python as `snman`<sup>1</sup> (Ballo and Axhausen, 2024). A notable part of the process is a heavy  
19 simplification of the street network, abstracting even complex intersections into single nodes and all  
20 streets into single edges. The reallocation then considers the entire available road space on every street,  
21 regardless of its representation in the original data.

<sup>1</sup> <https://github.com/lukasballo/snman/>

### 1 **3.3 Agent-based simulations in MATSim**

2 MATSim (Horni et al., 2016) is a multi-agent transport simulation toolkit, aimed at representing  
3 complex travel behaviors. Sonnak (2024) has used it to perform first simulations of the rebuilt networks  
4 generated using *snman*. Her work is based on an earlier MATSim scenario of Switzerland described in  
5 Tchervenkov et al. (2022). She demonstrated that the heavy network simplification does not have a  
6 substantial effect on the results, except where the capacity of minor roads is artificially increased by  
7 merging them with parallel major roads.

### 8 **3.4 Route choice modeling**

9 The effects of cycling infrastructure include not only travel time but also most importantly safety and  
10 comfort. Route choice studies such as Meister et al. (2023), Scott et al. (2021), Jensen (2019), Hood et  
11 al. (2011), Broach et al. (2012) have developed robust estimates of these effects on perceived utility.  
12 Converting them to Value of Distance (VoD) indicators allows representing these effects as added or  
13 reduced distance or travel time.


### 14 **3.5 Mode choice modeling**

15 The behavioral mode choice component of accessibility (Ben-Akiva and Lerman, 1979) introduced  
16 above requires a model to provide the choice probability of each mode. Hörl et al. (2019) present a  
17 discrete mode choice model for Switzerland that is paired with the MATSim scenario described above.  
18 However, the empirical evidence is limited for predicting such choices after a large change like in the  
19 E-Bike City, especially once secondary effects, such as those of an emerging cycling culture (te  
20 Brömmelstroet et al., 2020) are present.

## 21 **4 METHODS**

### 22 **4.1 Perimeter**

23 The perimeter covers the larger Zurich area which we define as all municipalities with at least 15% of  
24 population commuting to Zurich. The synthetic population generating traffic includes a buffer of 5km  
25 and traffic generated by trips beyond that buffer is represented by fixed trips cut out of the national  
26 model. The network includes an additional buffer of 5km, with small extensions for adjacent highway  
27 interchanges to avoid long disconnected highway sections. The process of generating the synthetic  
28 population in the MATSim scenario and its adaptation to the chosen perimeter, see Tchervenkov et al.  
29 (2022) and Sonnak (2024). Figure 1 shows an overview of the perimeter geometries.

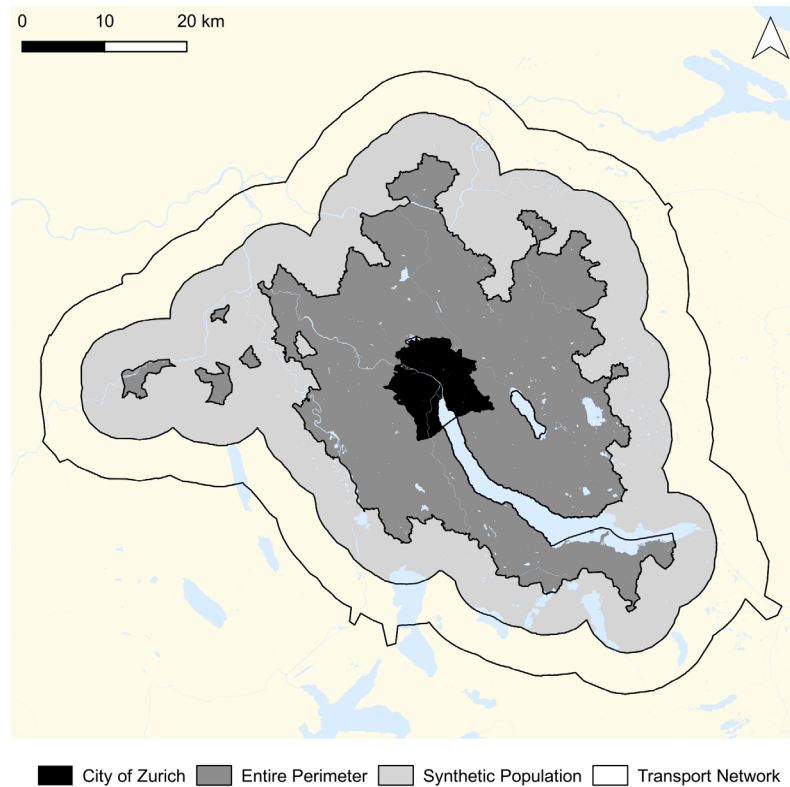

**Figure 1: Perimeter geometries**


1

## 2 4.2 Population data

3 The population data is provided by the 2017 Statpop dataset of Switzerland<sup>2</sup>, representing each  
4 registered resident, with attributes including age, sex, and residence permit. A spatial analysis of  
5 residential locations based on these attributes in Figure 2 shows clear spatial disparities: While central  
6 locations have a higher proportion of foreigners with residence permits, people under 65 years of age,  
7 and slightly more males, the periphery is more strongly occupied by the Swiss, elderly, and females.  
8 The effects of these spatial disparities on the accessibility changes experienced by each group will be  
9 studied in the results section.

---

<sup>2</sup> <https://www.bfs.admin.ch/bfs/de/home/statistiken/kataloge-datenbanken.assetdetail.27965868.html>

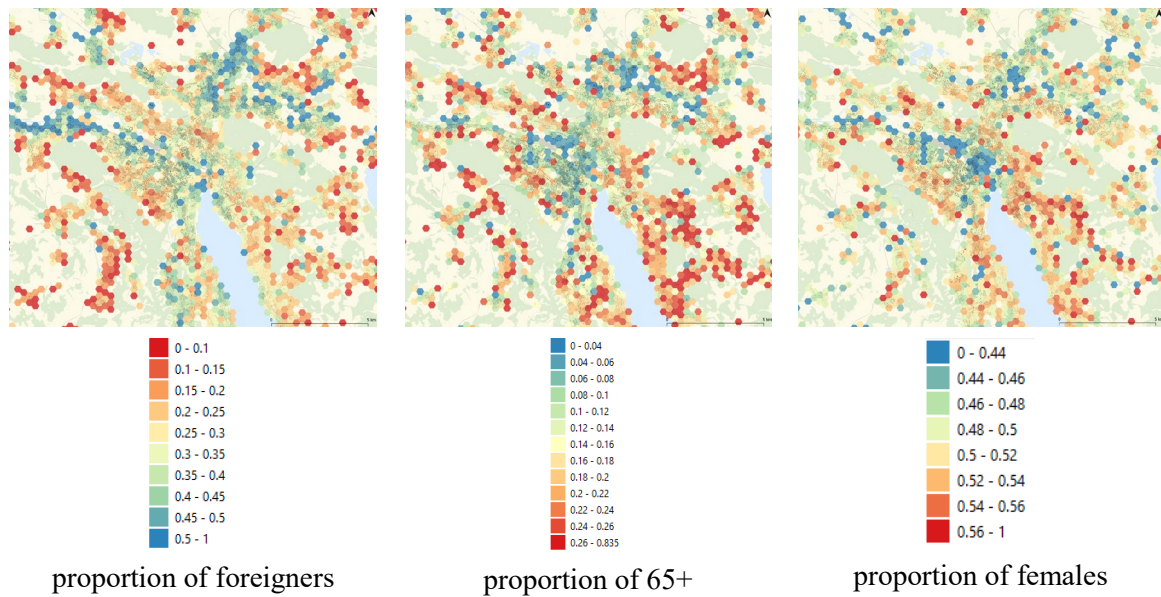

**Figure 2: Residential locations of different demographic groups**

1

## 2 4.3 Network data

3 The road network used is generated using `snman`, based on OpenStreetMap (OSM) data, enriched with  
 4 a parking dataset of the City of Zurich<sup>3</sup>, matched street widths from official land survey data of Canton  
 5 Zurich<sup>4</sup>, public transit routes<sup>5</sup>, and manual corrections of wrongly simplified complex intersections. See  
 6 Ballo and Axhausen (2024) for details. In contrast to the previous networks used by Sonnak (2024), the  
 7 simplification algorithm has been modified to avoid the issues described in section 3.3. The rebuilt  
 8 network is generated with a preference for cycling infrastructure, while maintaining the existing transit  
 9 network, ensuring reachability of every intersection by motorized traffic, and providing space for one  
 10 parking space/loading zone for every ten residents within a radius of 100 meters.

11 Every link has a length attribute for each mode and direction. For cycling, the length is adjusted using  
 12 the  $VoD$  indicators explained in section 3.4:

$$13 \quad l_{uvk,cycling} = l_{uvk} * [1 + VoD_{infra}(infra) + VoD_{grade}(grade)]$$

14 For  $VoD_{infra}$ , we assume -0.5 if dedicated cycling infrastructure is present and 0 otherwise.  $VoD_{grade}$   
 15 is 0.55 for  $2\% < grade \leq 6\%$ , 3.11 for  $6\% < grade \leq 10\%$  and 4.33 for  $10\% < grade$ . Table 2  
 16 shows descriptive statistics of the original, simplified, as well as rebuilt network.

<sup>3</sup> [https://data.stadt-zuerich.ch/dataset/geo\\_oeffentlich\\_zugaengliche\\_strassenparkplaetze\\_ogd](https://data.stadt-zuerich.ch/dataset/geo_oeffentlich_zugaengliche_strassenparkplaetze_ogd)

<sup>4</sup> <https://www.stadt-zuerich.ch/geodaten/download/10016>

<sup>5</sup> [https://data.stadt-zuerich.ch/dataset/ktzh\\_linien\\_des\\_oeffentlichen\\_verkehrs\\_ogd\\_](https://data.stadt-zuerich.ch/dataset/ktzh_linien_des_oeffentlichen_verkehrs_ogd_)



**Table 2: Descriptive statistics of the network**

Metric	Original OSM network	Simplified	Simplified and Rebuilt
N edges	61'250	25'660	25'660
N nodes	49'398	20'180	20'180
avg shortest path for motorized traffic	-	5.251	6.577 [km]
avg shortest path for cycling with VoD indicators	-	4.449	3.610 [km]
% road space for motorized traffic	-	72.2	46.1 [%]
% road space parking	-	15.8	15.5 [%]
% road space transit lanes	-	6.5	6.5 [%]
% road space cycling infra	-	5.5	30.8 [%]
% road space other	-	0	1.1 [%]

1

## 2 4.4 MATSim simulation

3 The distances calculated in previous step can be converted to travel times using assumptions about  
 4 average speeds. However, they do not account for differences due to traffic loads in motorized traffic.  
 5 To calculate realistic travel times, we use an agent-based traffic simulation in MATSim. The new travel  
 6 times for motorized traffic (accounting for congestion) are then mapped back into the snman network.

## 7 4.5 Mode choice model

8 We use the mode choice model in (Hörl et al., 2019):

$$\begin{aligned}
 u_{car}(x) = & \alpha_{car} \\
 & + \beta_{travelTime,car} * x_{travelTime,car} \\
 & + \beta_{travelTime,car} * \theta_{travelTime,car} \\
 & + \beta_{travelTime,car} * \theta_{parkingSearchPenalty} \\
 & + \beta_{travelTime,walk} * \theta_{accessEgressWalkTime} \\
 & + \beta_{cost} * \left( \frac{x_{crowflyDistance}}{\theta_{averageDistance}} \right)^\lambda * x_{cost,car}
 \end{aligned}$$

$$\begin{aligned}
 u_{pt}(x) = & \alpha_{pt} \\
 & + \beta_{numberOfTransfers} * x_{numberOfTransfers} \\
 & + \beta_{inVehicleTime} * x_{inVehicleTime} \\
 & + \beta_{transferTime} * x_{transferTime} \\
 & + \beta_{accessEgressTime} * x_{accessEgressTime} \\
 & + \beta_{cost} * \left( \frac{x_{crowflyDistance}}{\theta_{averageDistance}} \right)^\lambda * x_{cost,car}
 \end{aligned}$$

$$u_{bike}(x) = \alpha_{bike} + \beta_{travelTime,bike} * x_{travelTime,bike} + \beta_{age,bike} * \max(0, \alpha_{age} - 18)$$

$$u_{walk}(x) = \alpha_{walk} + \beta_{travelTime,walk} * x_{travelTime,walk}$$

1

2 To represent the uncertainties related to the large changes created by the E-Bike City transformation,  
3 we use the default parameters, as well as two modifications where the cycling-related parameters have  
4 been adjusted to achieve higher bicycle mode shares.

5 The default parameters, as well as the modifications are shown in Table 3.

**Table 3: Mode choice model parameters**

		Default scenario	+50% cycling	+100% cycling
Car	$\alpha_{car}$	0.827	0.827	0.827
	$\beta_{travelTime,car}$	-0.0667	-0.0667	-0.0667 [min <sup>-1</sup> ]
Public Transport	$\alpha_{pt}$	0.0	0.0	0.0
	$\beta_{numberOfTransfers}$	-0.17	-0.17	-0.17
	$\beta_{inVehicleTime}$	-0.0192	-0.0192	-0.0192 [min <sup>-1</sup> ]
	$\beta_{transferTime}$	-0.0384	-0.0384	-0.0384 [min <sup>-1</sup> ]
	$\beta_{accessEgressTime}$	-0.0804	-0.0804	-0.0804 [min <sup>-1</sup> ]
Bike	$\alpha_{bike}$	-0.1	*	*
	$\beta_{travelTime,bike}$	-0.0805	*	* [min <sup>-1</sup> ]
	$\beta_{age,bike}$	-0.0496	*	* [a]
Walking	$\alpha_{walk}$	0.63	0.63	0.63
	$\beta_{travelTime,walk}$	-0.141	-0.141	-0.141 [min <sup>-1</sup> ]
Others	$\beta_{cost}$	-0.126	-0.126	-0.126 [CHF <sup>-1</sup> ]
	$\lambda$	-0.4	-0.4	-0.4
	$\theta_{averageCrowflyDistance}$	40	40	40 [km]
Calibration	$\theta_{parkingSearchPenalty}$	6	6	6 [min]
	$\theta_{accessEgressWalkTime}$	5	5	5 [min]

\* to be adjusted based on the simulation results, such that the desired mode shift is achieved

6

## 7 4.6 Accessibility analysis

8 We calculate the accessibility for every residential location, considering all residents as possible  
9 destinations and all possible modes (private car, bicycle, transit, other) with their respective choice  
10 probabilities according to the mode choice model. The shortest path for each destination by car and  
11 bicycle is calculated using the `networkx` package (Hagberg et al., 2008). For public transit, we use the  
12 `R5` package (Conway et al., 2018), both allowing for fast n-to-n shortest-path search. As a result, the  
13 cost  $c_{ij}$  for reaching the destination  $j$  from an origin  $i$  is a weighted average of the different modes  $m$ ,  
14 using the choice probability  $P_{ijm}$  as the weight:

15

$$c_{ij} = \sum_m P_{ijm} * c_{ijm}$$

1 The resulting cost  $c_{ij}$  is then used for calculating the accessibility  $a_i$  for each location  $i$ , while  
 2 considering all residents as possible destinations  $j$ . The utility  $u_j$  of each destination is equal to the  
 3 number of residents living there:

$$4 \quad a_i = \sum_j f(c_{ij}) * u_j$$


## 5 5 RESULTS

6 Note: The results are under development and will be added in a later draft of this paper. The data reported  
 7 below represents the current state of work.

8 Figure 3 shows the relative bicycle accessibility in comparison to car accessibility – both, in the current,  
 9 and rebuilt network, assuming the present mode choice model (default scenario).

10

11

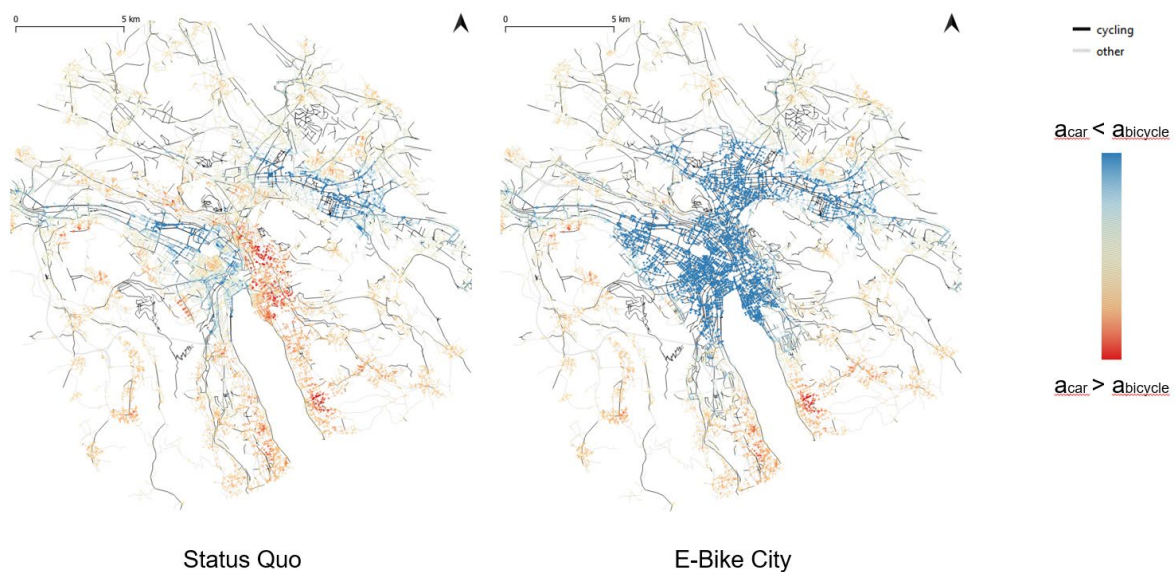

**Figure 3: Accessibility changes assuming the present mode choice model**

12

13 Table 4 shows the resulting accessibility for the entire population, as well as for a number of population  
 14 groups. The results are shown for the current state, and the E-Bike City, using the three mode choice  
 15 models described in 4.5.

**Table 4: Accessibility for different demographic groups (to be completed later)**

<b>Group</b>	<b>Accessibility in status quo (avg, median, std)</b>	<b>Change in default scenario (avg, median, std, sig.)</b>	<b>Change with +50% cycling (avg, median, std, sig.)</b>	<b>Change with +100% cycling (avg, median, std, sig.)</b>
Entire population				
City of Zurich				
Other Municipalities				
Young <25 yrs				
Elderly >65 yrs				
Male				
Female				
Swiss, born in CH				
Immigrants				

## 1 **6 DISCUSSION**

2 The discussion will be added later.

## 3 **7 CONCLUSIONS**

4 We have presented the first steps toward assessing whether a car-reduced urban mobility future can  
 5 maintain today's levels of accessibility. The code used in this paper is published as part of the open-  
 6 source Python project snman: <https://github.com/lukasballo/snman>

7

## 1 **AUTHOR CONTRIBUTIONS**

- 2 Lukas Ballo: Conceptualization, Data Curation, Investigation, Writing - Original Draft,  
3 Aurore Sallard: MATSim simulations, Writing – Review & Editing  
4 Lucas Meyer de Freitas: Data Curation, Writing – Review & Editing  
5 Kay Axhausen: Conceptualization, Writing – Review & Editing

## 6 **ACKNOWLEDGEMENTS**

- 7 Thanks to Miriam Sonnak for preparing the initial MATSim setup, to Milos Balac for advice  
8 on the mode choice model, and to Catherine Elliot for coordinating the E-Bike City project  
9 team.

## 10 **FUNDING**

- 11 Internal funds of Prof. Kay W. Axhausen, Swiss Federal Office of Energy.

## 12 **CONFLICTS OF INTEREST**

- 13 None.

14

## 1 REFERENCE LIST

- 2 Axhausen, K.W. (2022) The dilemma of transport policy making and the COVID-19 accelerator, in  
3 Attard, M. and C. Mulley (eds.) *Transport and Sustainability, Transport and Pandemic Experiences,*  
4 *Volume 17*, 39–51, Emerald Publishing Limited, Bingley.
- 5 Axhausen, K.W., P. Froelich and M. Tschopp (2011) Changes in Swiss accessibility since 1850,  
6 *Research in Transportation Economics*, **31** (1) 72–80.
- 7 Ballo, L. and K.W. Axhausen (2024) Modeling sustainable mobility futures using an automated process  
8 of road space reallocation in urban street networks: A case study in Zurich, paper presented at the *103rd*  
9 *Annual Meeting of the Transportation Research Board*, Washington DC, January 2024.
- 10 Ballo, L., L. Meyer de Freitas, A. Meister and K.W. Axhausen (2023) The E-Bike City as a radical shift  
11 toward zero-emission transport: Sustainable? Equitable? Desirable?, *Journal of Transport Geography*,  
12 **111**, 103663.
- 13 Ben-Akiva, M. and S.R. Lerman (1979) Disaggregate travel and mobility-choice models and measures  
14 of accessibility, in Hensher, D.A. and P.R. Stopher (eds.) *Behavioural Travel Modelling*, 654–679,  
15 Routledge, London.
- 16 BFS and ARE (2023) Mobilitätsverhalten der Bevölkerung: Ergebnisse des Mikrozensus Mobilität und  
17 Verkehr 2021, Bundesamt für Statistik, Bundesamt für Raumentwicklung, Neuchâtel.
- 18 Broach, J., J. Dill and J. Gliebe (2012) Where do cyclists ride? A route choice model developed with  
19 revealed preference GPS data, *Transportation Research Part A: Policy and Practice*, **46** (10) 1730–  
20 1740.
- 21 City of Zurich (2024) Zürich in Zahlen - Stadt Zürich, [https://www.stadt-](https://www.stadt-zuerich.ch/portal/de/index/portraet_der_stadt_zuerich/zuerich_in_zahlen.html)  
22 [zuerich.ch/portal/de/index/portraet\\_der\\_stadt\\_zuerich/zuerich\\_in\\_zahlen.html](https://www.stadt-zuerich.ch/portal/de/index/portraet_der_stadt_zuerich/zuerich_in_zahlen.html), April 2024.
- 23 Conway, M.W., A. Byrd and M. Van Eggermond (2018) Accounting for uncertainty and variation in  
24 accessibility metrics for public transport sketch planning, *Journal of Transport and Land Use*, **11** (1)  
25 541–558.
- 26 Cox, B., C.L. Mutel, C. Bauer, A. Mendoza Beltran and D.P. van Vuuren (2018) Uncertain  
27 environmental footprint of current and future battery electric vehicles, *Environmental Science &*  
28 *Technology*, **52** (8) 4989–4995.
- 29 de Blas, I., M. Mediavilla, I. Capellán-Pérez and C. Duce (2020) The limits of transport decarbonization  
30 under the current growth paradigm, *Energy Strategy Reviews*, **32**, 100543.
- 31 Eggimann, S. (2022) The potential of implementing superblocs for multifunctional street use in cities,  
32 *Nature Sustainability*, **5**, 406–414.
- 33 Gebler, M., J.F. Cerdas, S. Thiede and C. Herrmann (2020) Life cycle assessment of an automotive  
34 factory: Identifying challenges for the decarbonization of automotive production – A case study, *Journal*  
35 *of Cleaner Production*, **270**, 122330.
- 36 Geurs, K.T. and B. van Wee (2004) Accessibility evaluation of land-use and transport strategies: review  
37 and research directions, *Journal of Transport Geography*, **12** (2) 127–140.
- 38 Hagberg, A.A., D.A. Schult and P.J. Swart (2008) Exploring network structure, dynamics, and function  
39 using NetworkX, paper presented at the *7th Python in Science Conference*, Pasadena, 2008.

- 1 Hansen, W.G. (1959) How accessibility shapes land use, *Journal of the American Institute of Planners*,  
2 **25** (2) 73–76.
- 3 Hood, J., E. Sall and B. Charlton (2011) A GPS-based bicycle route choice model for San Francisco,  
4 California, *Transportation Letters*, **3** (1) 63–75.
- 5 Hörl, S., M. Balać and K.W. Axhausen (2019) Pairing discrete mode choice models and agent-based  
6 transport simulation with MATSim, paper presented at the *98th Annual Meeting of the Transportation*  
7 *Research Board (TRB 2019)*, Washington DC, January 2019.
- 8 Horni, A., K. Nagel and K.W. Axhausen (2016) *The Multi-Agent Transport Simulation MATSim*,  
9 Ubiquity Press, London.
- 10 IPCC (2022) Climate change 2022, mitigation of climate change, summary for policymakers,  
11 Intergovernmental Panel on Climate Change, Geneva.
- 12 Jensen, A.F. (2019) Using crowd source data in bicycle route choice modeling, paper presented at the  
13 *Trafikdage*, Aalborg, July 2019.
- 14 Lichtin, F., E.K. Smith, K.W. Axhausen and T. Bernauer (2024) How to design publicly acceptable road  
15 pricing? Experimental insights from Switzerland, *Ecological Economics*, **218**, 108102.
- 16 Meister, A., M. Felder, B. Schmid and K.W. Axhausen (2023) Route choice modeling for cyclists on  
17 urban networks, *Transportation Research Part A: Policy and Practice*, **173**, 103723.
- 18 Moreno, C., Z. Allam, D. Chabaud, C. Gall and F. Pratlong (2021) Introducing the “15-minute city”:  
19 Sustainability, resilience and place identity in future post-pandemic cities, *Smart Cities*, **4** (1) 93–111.  
20
- 21 Paulsen, M. and J. Rich (2023) Societally optimal expansion of bicycle networks, *Transportation*  
22 *Research Part B: Methodological*, **174**, 102778.
- 23 Rueda, S. (2019) Superblocks for the design of new cities and renovation of existing ones: Barcelona’s  
24 case, in Nieuwenhuijsen, M. and H. Khreis (eds.) *Integrating Human Health into Urban and Transport*  
25 *Planning*, 135–153, Springer International Publishing, Cham.
- 26 Scott, D.M., W. Lu and M.J. Brown (2021) Route choice of bike share users: Leveraging GPS data to  
27 derive choice sets, *Journal of Transport Geography*, **90**, 102903.
- 28 Sonnak, M. (2024) Evaluation of E-Bike-City road networks, *Master Thesis*, ETH Zurich, Zurich.  
29
- 30 Steinacker, C., D.-M. Storch, M. Timme and M. Schröder (2022) Demand-driven design of bicycle  
31 infrastructure networks for improved urban bikeability, *Nature Computational Science*, DOI:  
32 <https://doi.org/10.1038/s43588-022-00318-w>.
- 33 Szell, M., S. Mimar, T. Perlman, G. Ghoshal and R. Sinatra (2022) Growing urban bicycle networks,  
34 *Scientific Reports*, **12** (1) 6765.
- 35 Tchervenkov, C., G.O. Kagho, A. Sallard, S. Hörl, M. Balać and K.W. Axhausen (2022) The  
36 Switzerland agent-based scenario, *Arbeitsberichte Verkehrs- und Raumplanung*, **1802**, IVT, ETH  
37 Zurich, Zurich.
- 38 te Brömmelstroet, M., W. Boterman and G. Kuipers (2020) How culture shapes - and is shaped by -  
39 mobility: Cycling transitions in The Netherlands, in Curtis, C. (ed.) *Handbook of Sustainable Transport*,  
40 109–118, Edward Elgar Publishing, Cheltenham.

1

2